



2D Desktop Barcode Scanner

User Manual

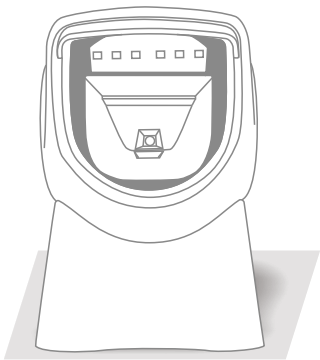

V:1807

Press the button to switch between Auto-scanning mode and Continuous mode.

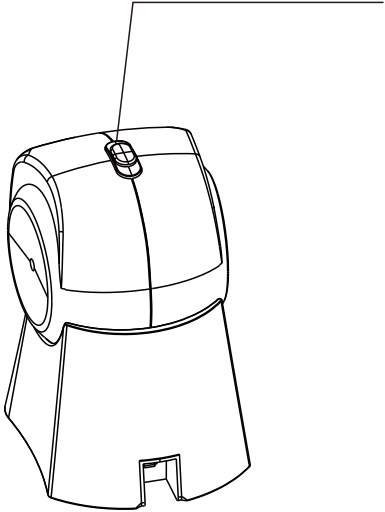

(Note: the barcode with * is default setting)

Connecting the Scanner

1. Connect the barcode scanner to the special accessory cable joint.
2. Plug the other special accessory cable joint to the PC.

Default Configuration

Scanning the below bar code makes the product restore the factory default settings.



Restore the Factory Default Settings

Prefix



Cancel the Prefix of All Bar Codes



Add STX Prefix

Suffix



Cancel the Suffix of All Bar Codes



Add CR Suffix to All Bar Codes

①

②



Add LF Suffix to All Bar Codes



Add CR+LF Suffix to All Bar Codes



Add TAB Suffix to All Bar Codes



Add ETX Suffix to All Bar Codes

Decoding Prompt Sound ON/OFF



OFF



(*)ON

Decoding Prompt Sound Volume



Low



(*)Medium



High

Upload Speed

The following bar codes are used to configure the speed of uploading. If you use a PC with low capacity, we suggest you choose the low speed for the precision of the uploading data.



(*)Low



Medium



High

Language Settings



(*)English (United States)



French (France)



Italian (Italy)



Italian 142 (Italy)



German (Germany)



Spanish (Spain)



Russian (MS)



Russian (typewriter)

③

④

⑤



Arabic (101)



Portuguese (Portugal)



Portuguese (Brazil)



Finnish



Japanese



Irish



Polish (214)



Polish (Programmers)



Dutch (Netherlands)



Swedish (Sweden)



Turkish F

Codabar



(*)Enable Codabar



Czech (QWERTZ)



Turkish Q



Greek (MS)



Disable Codabar

Codabar Start/Stop CHARS



(*)Disable Transmit Codabar Start/Stop CHARS



Enable Transmit Codabar Start/Stop CHARS

Code 39



(*)Enable Code 39



Disable Code 39

Code 39 Full ASCII



Enable Full ASCII



(*)Disable Full ASCII

Code 32 (Need Code 39 ON)



(*)Enable Code 32



Disable Code 32

⑥

⑦

⑧

Interleaved 2 of 5 (ITF25) (4-24 Bits)



(*)Enable ITF25



Disable ITF25

Interleaved 2 of 5 (ITF25) Check Bit



(*)Disable ITF25 Check



Enable ITF25 Check Without Check Bit



Enable ITF25 Check With Check Bit

Industrial 2 of 5 (4-24 Bits)



(*)Enable Industrial 2 of 5



Disable Industrial 2 of 5

Matrix 2 of 5 (4-24 Bits)



(*)Enable Matrix 2 of 5



Disable Matrix 2 of 5

9

Code 93



(*)Enable Code 93



Disable Code 93

Code 128



(*)Enable Code 128



Disable Code 128

GS1-128



(*)Enable GS1-128



Disable GS1-128

UPC-A



(*)Enable UPC-A



Disable UPC-A

10

UPC-A Check Bit



(*)UPC-A With Check Bit



UPC-A Without Check Bit

Convert UPC-A into EAN-13



Enable Convert UPC-A into EAN-13



(*)Disable Convert UPC-A into EAN-13

UPC-E



(*)Enable UPC-E



Disable UPC-E

UPC-E Check Bit



(*)UPC-E With Check Bit



UPC-E Without Check Bit

11

EAN/JAN-8



(*)Enable EAN/JAN-8



Disable EAN/JAN-8

EAN/JAN-13



(*)Enable EAN/JAN-13



Disable EAN/JAN-13

UPC/EAN/JAN Supplement



(*)NO UPC/EAN/JAN Supplement



Decode UPC/EAN/JAN Supplement



UPC/EAN/JAN Supplement Self-adaption

12

EAN13 Convert into ISBN



Enable Convert EAN13 into ISBN



(*)Disable Convert EAN13 into ISBN

EAN13 Convert into ISSN



Enable Convert EAN13 into ISSN



(*)Disable Convert EAN13 into ISSN

GS1 DataBar(RSS14)



(*)Enable GS1 DataBar



Disable GS1 DataBar

GS1 DataBar Limited



(*)Enable GS1 DataBar Limited



Disable GS1 DataBar Limited

13

Gs1 DataBar Expanded



(*)Enable Gs1 DataBar Expanded



Disable Gs1 DataBar Expanded

PDF417



(*)Enable PDF417



Disable PDF417

QR Code



(*)Enable QR



Disable QR

Micro QR



(*)Enable Micro QR



Disable Micro QR

14

Data Matrix



(*)Enable Data Matrix



Disable Data Matrix

Aztec Code



(*)Enable Aztec



Disable Aztec

Warning Sound

When the scanner fails to upload the data, it will beep four times continually. In this situation, please check whether the cable joints are correctly connected or not.

Scanning Skills

To guarantee a precise read, please keep the beam of the scanner on the center of the bar code at any direction.

Hold the scanner before the bar code, press the manual trigger and make sure the beam aim at the center of the code.

As the scanner gets closer to the bar code, the beam become narrower and as the scanner gets farther to the bar code, the beam become wider. Therefore, to make quick precise read, please keep the scanner close to the bar code if it is small and keep the scanner far to the bar code if it is big.

The barcode scanner with a high reflectance needs to lean to a certain angle to make quick precise read.

Safety

Please do not stare at the screen of the scanner when it is at work, in case the strong beam makes your eyes uncomfortable or injured.

15

Environmental Tips

Environment-friendly use period of this product is 10 years. Climatic conditions for normal work, storage, and transportation specified in the technical characteristics of the product. At the end of use period, we suggest to return the product (including package) to our company.

Assembly unit name	Harmful substances					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
Shell	○	○	○	○	○	○
PCB	×	○	○	○	○	○
Cable	○	○	○	○	○	○
Packaging Materials	○	○	○	○	○	○

This form is prepared according to the provisions of SJ/T 11364.

○ : It is indicated that the content of the harmful substance in all the homogeneous materials of the component is below the limit specified in GB/T 26572.

× : It is indicated that the content of the harmful substance at least in one certain homogeneous material of the component is beyond the limit specified in GB/T 26572.

Note : 1. Most components in this product use harmless environment-friendly materials, and due to limited international technology level, some harmful materials cannot be replaced.

2. The environmental data for reference are tested in the normal use and storage environment of this product requirements, such as humidity and temperature, etc.

16

Warranty Card

- Customers can enjoy the legal rights using the purchase invoice and the warranty card without doing any warranty procedures.
- All the warranty items are subject to the guarantee clause and user notice that published by our company.
- We will not guarantee the product if it is in one of the following situation, but we can offer maintenance service with charges.
 - Man-made damage or improper operation;
 - Damage caused by maintenance of non-professionals;
 - Have no warranty card,the model is inconsistent with actual or the warranty card is obliterated;
 - Irresistible damage (natural disasters like thunder, earthquake, fire, etc).
- Please fill in the warranty card.Do no obliterate the card. Otherwise,we will make charges maintenance.
- Please keep this card well. We will not offer another warranty card.

Barcode Scanner Warranty Proof

User Name				Telephone	
Address					
Purchasing Date	D/	M/	Y	Model	
Serial NO.				Agency	
Maintenance Record					
Date	Product Failure			Maintenance Condition	Repairman

17